

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
10000-1

Total Pages in this Submission
21

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

VAPOR/LIQUID CONTACTING CYCLONE WITH SECONDARY VANES

and invented by:

John S. Buchanan; Berne K. Stober

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 13 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
10000-1

Total Pages in this Submission
21

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 5
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☐ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EI23853225US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
10000-1

Total Pages in this Submission
21

Accompanying Application Parts (Continued)


15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	10	- 20 =	0	x \$22.00	\$0.00
Indep. Claims	4	- 3 =	1	x \$82.00	\$82.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$790.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$872.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-3150 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$872.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Dated: 6/30/98

Penny L. Prater
Attorney for the Applicant(s)
Registration Number 34,965
(703) 846-7746

CC:

Vapor/Liquid Contacting Cyclone with Secondary Vanes

5 Field of the Invention

This invention is directed to a cyclonic vapor/liquid contacting device and the process of employing it in distillation or related mass transfer or heat transfer applications, such as fluid catalytic cracking. This invention is directed to the use of secondary vanes
10 placed in the cyclone at a point above the level of initial liquid removal as well as to an area at the base of the cyclone where spin is minimized.

15 Background of the Invention

Cyclone separators are well-known devices for separating solids from gases and gases from liquids. Some typical cyclone separator designs are illustrated in Perry's Chemical Engineers' Handbook, published by McGraw-Hill Book Company, New York City.

20 The use of vanes within cyclones is well-known. They are used to guide the flow of gases and minimize entrainment of liquids or solids. U.S. Pat. No. 3,969,096(Herbert) discloses a cyclone separator having multiple vaned gas inlets. The gas inlet consists of elongated inlet openings (like those of a louver) positioned to
25 deflect incoming gas in a circular path from the gas outlet tube.

U.S. Pat. No. 3,707,830(Gustavasson) discloses a cyclone separator having a cylindrical shell with a conical converging inlet portion. A ring of guide vanes is positioned within the outlet to impart a rotational flow to the entering gas. The ring is
30 axially moveable.

U.S. Pat. No. 5,683,493 (Stober) discloses close packed cyclones similar to those depicted in one embodiment of the instant invention. In the preferred embodiment, however, vapor and entrained liquid are directed upward in a rotational fashion by tabs
35 in the base of the cyclone. The instant invention discloses close-packed cyclones in which one embodiment does not possess a spinning zone at its base.

5 Figure 1 shows a cyclonic device for vapor/liquid contacting in which liquid is introduced near the floor of the cyclone. The barrel is drawn with dashed lines, to distinguish it from the other parts of the device. Preferably, liquid is introduced through a downcomer tube located axially in the cyclone barrel, as shown in Figure 1. Alternately, it may be introduced through a plenum, which is fed by a downcomer from the tray above (this
10 embodiment is not depicted).

As vapor rises through the base of the cyclone, it passes through orifices which impart a spin to the vapor. As patents such as U.S. Pat. No. 3,969,096 demonstrate, the concept of devices, such as vanes, to impart spin located at the inlet of the cyclone is
15 known. Preferably, these vanes are formed integrally with holes in the base of the cyclone. The gas then imparts a rotational action to the liquid. The liquid is preferentially thrown to the outside of the cyclone. Openings in the barrel of the cyclone allow the liquid to exit from the cyclone. Flaps or baffles in or near these openings may be used to help direct liquid out through the openings. An annular hat above the barrel
20 may also be used to capture liquid emerging from the top of the barrel and to direct this liquid downward. If the conventional device depicted in Figure 1 is used, the liquid can dampen the spin action of the vapor. This reduces the liquid collection efficiency in the cyclone.

25 U.S. Pat. No. 3,498,028(Trouw) illustrates a vessel for contacting liquid and vapor when a large supply of liquid must be accommodated. Liquid is added at the base of the vessel through a horizontal tube extending inward toward the center. Vapor rises into the vessel vertically. Vapor and liquid mix at the base of the vessel, and vapor rises with entrained liquid.

30 G.B. 1,070,777, assigned to Shell International Research, illustrates a tray for mounting in a column for liquid/ gas contacting which possesses at least one tubular liquid/gas contacting device, which is located at the base of the column. In U.S.Pat. No. 5,683,629, the liquid delivery device first disclosed in G.B. 1,070,777 further comprises
35 a plurality of parallel channels having upwardly directed openings. This increases the entrainment of liquid in the gas, thereby improving heat transfer.

- 5 In conventional cyclones, spin is imparted to the vapor and entrained liquid after it enters the cyclone via a downcomer or plenum. The vapor and entrained liquid then moves upward, entering a zone where liquid is removed via slots or other perforations in the barrel or by an annular hat in the top of the barrel.

10

Summary of the Invention

- The instant invention, a cyclone having at least two sets of spin imparting elements, (such as vanes) and the process of liquid and vapor separation occurring in the cyclone is illustrated in Figure 2. Placing secondary spin vanes, as shown in Figure 2, in the cyclone some distance above the base of the cyclone, imparts additional spin to the vapor, which helps the liquid collection efficiency of the cyclone. This reduces the amount of liquid carried upwards and out of the cyclone with the vapor. This type of liquid entrainment is usually undesirable in a fractionation device, since it can reduce fractionation efficiency and lead to flooding of a distillation column. A zone may be located at the base of the cyclone in which spin is minimized.

- In the instant invention, at least some liquid removal begins below the final (uppermost) spin-imparting element. Preferably these elements are two distinct sets of spin vanes, with exit slots in the cyclone barrel starting below the upper set of spin vanes. After entering the cyclone via a downcomer or plenum, vapor and entrained liquid preferably enter a zone at the base of the cyclone where there are no vanes or other devices to impart spin. The vapor and entrained liquid move upward through the cyclone, encountering spin vanes which direct some of the entrained liquid to the walls of the barrel, where it is removed via slots. The vapor and the remainder of entrained liquid then encounter a second set of spin vanes, which impart spin to the entrained liquid so that it can be effectively removed via perforations such as slots or holes in the sides of the barrel or through annular hats at the top of the cyclone.
- 35 There may be overlap between the initial zone for liquid removal and the second set of spin vanes.

5 As liquid exits the barrel of this device, it may have appreciable upwards velocity, which can interfere with the desired liquid collection. Placing means outside the cyclone to break the upward momentum can therefore aid in liquid collection. A variety of vanes or baffles may serve as this means. Fabrication can be simplified by forming these vanes integrally from the barrel material as opposed to fastening additional devices to
10 the barrel. Figure 3 shows a preferred means, which is a plurality of capping vanes. These capping vanes may be placed along the top of an exit hole, and additionally at multiple elevations across the hole.

Many of Mobil's Fluid Catalytic Cracking (FCC) units are limited by the downstream gas
15 plant. The cyclone of this invention can help debottleneck gas plants, and a variety of other atmospheric and high pressure towers. Its capacity benefits are probably highest at conditions of medium liquid flux (about 5-50 gpm/ft² of tower area). It may retain a high capacity at conditions of even lower liquid loads and very high vapor rates, such as found in vacuum towers, although some pressure drop may occur.

Brief Description of the Figures

Figure 1 illustrates a conventional cyclone design, with liquid traveling downward in a
25 central downcomer and vapor traveling upward. The vapor and liquid initially contact each other in the vicinity of the spin vanes at the base of the cyclone.

Figure 2 shows the conventional design, augmented by the additional of secondary
vanes near the mid-point of the cyclone's elevation.

Figure 3 shows the capping vanes, which may be installed outside the cyclone to
30 break up the upward momentum of liquid exiting the cyclone.

Figure 4 illustrates a cyclone design in which there are no spin vanes at the floor of the
35 barrel. Sieve holes are employed instead.

Figure 5 illustrates the cyclone design of Figure 4, with the additional feature of a packed non-spinning zone.

5 Detailed Description of the Invention

The instant invention comprises an improved cyclone design as well as a process for separating liquid and vapor employing the improved cyclone design. As illustrated in Figure 1 and described in the prior art, vanes 1 are frequently located at the cyclone inlet where liquid and vapor mix. Vapor enters through sieve holes 2. Liquid descends through the downcomer and enters contacting area of cyclone through outlet near the cyclone floor, to mix with the vapor. Vapor and entrained liquid rise in the cyclone barrel. The liquid is spun to outside wall of the cyclone barrel, where it exits through outlets 4. Figure 2 depicts the location of secondary vanes 1. The secondary vanes of the instant invention may be located anywhere within the barrel of the cyclone. The preferred elevation is near the mid-point of the cyclone's elevation. This allows much of the liquid to exit from the lower part of the cyclone, such that the fluid which is in contact with the secondary vanes is mainly vapor, with only a minor amount of liquid.

There is no restriction on the geometry of the secondary vanes. Practically, the geometry of the vanes is chosen to provide the desired amount of spin action, while taking into consideration such aspects as minimizing pressure drop and manufacturing cost. There may be more than one set of secondary vanes. There can be a single helical-shaped secondary vane. Preferably, a single set of secondary vanes is used, which occupy 5-25% of the elevation of the cyclone. If straight (uncurled) vanes are used, the preferred angle to the vertical is 30-60 degrees, more preferably 40-55 degrees, as shown in Figure 2. Preferably, the vanes extend from the center of the barrel, or (if a central downcomer tube is used) from the surface of the downcomer tube to the wall of the cyclone or to within a distance d from the cyclone wall, where d is equal to 0.02-0.1 times the diameter of the cyclone.

The cyclone barrel may be cylindrical, conical, or any other shape, including hexagonal or octagonal, that allows vapor and liquid circulation within it. Neighboring cyclones may be close enough to touch or be further apart. Preferably, the area enclosed by the cyclones amounts to 40-85% of the total area on a given level. The cyclonic devices described may be mounted in a variety of ways in a vessel to accomplish vapor/liquid contacting. In one arrangement, the cyclone barrels are affixed to at their base to horizontal sheets, which take the form of individual trays, which are attached to the

5 vessel walls. Circular downcomers convey liquid from one tray to the tray below, with each downcomer terminating within the barrel of a cyclone on the tray below. There is a space above each cyclone, and the weight of the tray with its cyclones is transmitted to the vessel wall via the tray.

10 In another arrangement, the cyclone barrel may extend upwards to the level of the horizontal sheet above, such that the weight of a sheet and its cyclones is borne primarily by the cyclones of the level below. In this arrangement, the cyclonic devices become part of a structured packing, which can have reduced fabrication and installation costs.

15

As liquid exits the barrel of the cyclone of this invention, it may have appreciable upwards velocity, which can interfere with the desired liquid collection. Placing means outside the cyclone to break the upward momentum can therefore aid in liquid collection. A variety of vanes or baffles may serve as this means. Figure 3 shows a preferred means, which is a plurality of capping vanes 1. These capping vanes may be placed along the top of an exit hole, and additionally at multiple elevations across the hole.

20

Figure 4 illustrates cyclones where there are no spin vanes (a non-spinning zone) in the portion of the cyclone near the floor the at the floor of the barrel. The simplest case is where there are simple sieve holes in the base plate. This gives a non-spinning zone of vapor/liquid contacting at the base of the cyclone, which is 2-20 inches (preferably 3-10 inches) high. This provides excellent vapor/liquid contacting for mass transfer. There are no exit slots in the barrel in this non-spinning zone. In one variation, this zone may be packed with some sort of packing, such as structured corrugated packing, grids, random packing, or mesh, with other baffles or vanes, to promote vapor/liquid contacting.

30

Above this non-spinning zone is a set of primary spin vanes, to impart spin to the rising vapor/liquid mixture. Above this primary set of spin vanes begin the exit slots in the barrel of the cyclone. A set of secondary spin vanes is located somewhere above the lowest opening of the exit slots. This arrangement is shown in Figure 4. A packed

35

5 non-spinning zone 1 is shown in Figure 5. Figure 5 also shows an annular hat 2 for
liquid collection. The preferred elevation for the secondary vanes is about in the middle
of the slotted section. The secondary vanes could extend for the full elevation of the
slotted section of the barrel, that is, from just above the primary vanes or even appear
as an upward extension of the primary vanes into the slotted section, so that there is
10 only one elongated spin-imparting zone 1, as shown in Figure 6. It is notable that liquid
withdrawal starts below the top of the through outlets 2 located below top of spin-
imparting zone 1. It is preferred, however, to have separate, secondary vanes and it is
preferred that the secondary vanes occupy only about 5-25% of the total elevation of
the cyclone. As illustrated in Figure 3, baffles such as splash caps are preferred on the
15 outside of the barrel.

The preferred perforation pattern in the floor or base of the cyclone which is depicted in
Figures 4 and 5 is a uniform pattern of sieve holes, with diameter 0.3-0.6 inch.
However, any type of opening in the floor of the cyclone which allows vapor passage,
20 while sized small enough to prevent massive weeping of liquid, is acceptable. These
openings could be various shapes, such as slots, and have a nonuniform spatial
distribution, and could have various types of hardware such as valves or vanes
associated with them. These openings are preferably sized to produce a pressure drop
across the base plate of 0.5 to 3.0 inches head of the process liquid.

25 As with the inventions of Figures 1-3, this arrangement of a non-spinning zone,
surmounted by spin vanes and liquid exit means can apply to isolated barrels on a tray,
or to cyclone barrels that are closely packed such that they are touching, and the
remaining space between them defines liquid downcomers. Barrels may be circular,
30 conical, or contain straight-sided segments. U.S. Pat. No. 5,683,493 is directed to
close-packed cyclones, but without the non-spinning zone at the base and without
secondary spin vanes.

5 What is claimed is:

1. A series of cyclonic devices suitable for use in the contacting of vapor and liquid in a distillation or fractionation process, wherein each device comprises:

10 (a) a floor;

(b) a continuous side wall having an upper end and a lower end, said lower end terminating into said floor, said upper end defining an upper cyclonic region which may be adjacent to the floor of another cyclonic device, and said
15 side walls defining a contacting volume above the floor and below the upper cyclonic region;

(c) at least one vapor opening in said floor through which vapors can flow into said contacting volume;

20 (d) at least one liquid downcomer comprising:

(1) downcomer side walls having an upper portion and a lower portion, said upper portion being located in the upper cyclonic region, and said lower portion extending to a point above the cyclone floor and having a lower portion end;

25 (2) at least one downcomer port located proximate to the lower portion end of the downcomer, said port defining an opening in said downcomer side walls through which liquid can flow;

30 (e) at least one liquid outlet located on one side wall, said liquid outlet defining an opening in said side wall through which liquid can flow;

35 (f) at least two sets of devices to impart spin to the vapor and entrained liquid wherein at least one liquid outlet of (e) is located on the side wall between the first set of spin devices and the second set of spin devices.

5

2. A series of cyclonic devices suitable for use in the contacting of vapor and liquid in a distillation or fractionation process, wherein each device comprises:

10

(a) a floor;

15

(b) a continuous side wall having an upper end and a lower end, said lower end terminating into said floor, said upper end defining an upper cyclonic region which may be adjacent to the floor of another cyclonic device, and said side walls defining a contacting volume above the floor and below the upper cyclonic region;

20

(c) at least one vapor opening in said floor through which vapors can flow into said contacting volume;

25

(d) at least one plenum, located near the floor of the cyclonic device, through which liquid may enter the cyclone;

(e) at least one liquid outlet located on one side wall, said liquid outlet defining an opening in said side wall through which liquid can flow;

30

(f) at least two sets of devices to impart spin to the vapor and entrained liquid wherein at least one liquid outlet of (e) is located on the side wall between the first set of spin devices and the second set of spin devices.

3. A series of cyclonic devices suitable for use in the contacting of vapor and liquid in a distillation or fractionation process, wherein each device comprises:

35

(a) a floor;

(b) a continuous side wall having an upper end and a lower end, said lower end terminating into said floor, said upper end defining an upper cyclonic

5 region which may be adjacent to the floor of another cyclonic device , and said side walls defining a contacting volume above the floor and below the upper cyclonic region;

10 (c) at least one vapor opening in said floor through which vapors can flow into said contacting volume;

(d) at least one tray located outside the continuous side wall, through which liquid enters the cyclonic device at or near its floor;

15 (e) at least one liquid outlet located on one side wall, said liquid outlet defining an opening in said side wall through which liquid can flow; Scott-I'm not quite clear on this concept

20 (f) at least two sets of devices to impart spin to the vapor and entrained liquid wherein at least one liquid outlet of (e) is located on the side wall between the first set of spin devices and the second set of spin devices.

25 4. The series of cyclonic devices recited in claim 1, claim 2, or claim 3 wherein there are no devices to impart spin located at the floor of a cyclonic device.

5. The series of cyclonic devices recited in claim 1, claim 2, or claim 3, wherein at least one outlet is located on at least side wall between the initial set of spin devices and the second set of spin devices.

30 6. The series of cyclonic devices recited in claim 1, claim 2, or claim 3 , whereby said cyclonic devices are connected in such a way that the sidewalls of adjacent cyclonic devices contact each other to an extent and the sidewalls also define an opening between adjacent cyclonic devices.

35

- 5 7. The series of cyclonic devices of claims 1, 2 or 3 wherein the side walls of the cyclonic device side walls form a shape selected from the group consisting of cylindrical, conical, hexagonal or octagonal.
- 10 8. The series of cyclonic devices of claims 1, 2 or 3 wherein one set of devices to impart spin is located near the middle of the elevation of each cyclonic device
9. The series of cyclonic devices of claims 1, 2 or 3 wherein one set of devices to impart spin occupies 5-25% of the elevation of each cyclonic device.
- 15 10. In a process for fractionating, distilling, or the like, the improvement comprising:
- (a) providing a vertical column having surrounding sidewalls;
- 20 (b) feeding a first and a second fluid into the column, wherein the first fluid is in its vapor state and the second fluid is in its liquid state within the column;
- 25 (c) directing the first and second fluids to flow through a series of cyclonic devices located within the column, each cyclonic device comprising:
- (1) a floor;
- 30 (2) a continuous side wall having an upper end and a lower end, said lower end terminating into said floor, said upper end defining an upper cyclonic region which may be adjacent to the floor of another cyclonic device, and said side walls defining a contacting volume above the floor and below the upper cyclonic region;
- 35 (3) at least one vapor opening in said floor through which vapors can flow into said contacting volume;

5 (4) at least one liquid outlet located on one side wall, said liquid outlet defining an opening in said side wall through which liquid can flow;

(5) at least two sets of devices to impart spin to the vapor and entrained liquid, wherein at least one liquid outlet of (4) is located on the side wall
10 between the first set of spin devices and the second set of spin devices;

(d) also directing said fluids to flow through a plurality of liquid downcomers comprising:

15 (1) downcomer side walls having an upper portion and a lower portion, said upper portion being located in the upper cyclonic region, and said lower portion extending to a point above the cyclone floor and having a lower portion end;


20 (2) at least one downcomer port located proximate to the lower portion end of the downcomer, said port defining an opening in said downcomer side walls through which liquid can flow;

25 whereby the vapors present within said column flow upward from one cyclonic device to the next through said vapor openings and the liquid present within said column flows downward from one cyclonic device to the next by passing through said liquid outlet and through the downcomers, and whereby the liquid and vapor contact each other in a co-current fashion within the contacting volume of the cyclonic devices.
30

5 **Abstract of the Disclosure**

This invention is directed to a cyclonic vapor/liquid contacting device and distillation or related mass transfer or heat transfer processes employing its use, such as fluid catalytic cracking. Liquid feed is introduced near the floor of the cyclone via downcomer or plenum. Vapor enters through sieve holes in the bottom of the cyclonic device. Near the floor are angled tabs or vanes that impart a spin to the vapor rising up through the floor. The tabs or vanes mix the liquid and vapor. The liquid is then thrown toward the cyclone wall, where it exits through slots in the wall. A second set of tabs or vanes, located about in the middle of the cyclone, imparts additional spin to the vapor and entrained liquid rising through the cyclone. This improves liquid collection by the cyclone, especially in cases where a heavy liquid load dampens the spin action of the vapor in the base of the cyclone. In another embodiment, there is a non-spinning zone at the floor of the cyclone barrel which permits improved heat transfer between the liquid and vapor. If a non-spinning zone is used, the two sets of vanes or tabs are located at higher elevations within the barrel.

Figure 1.

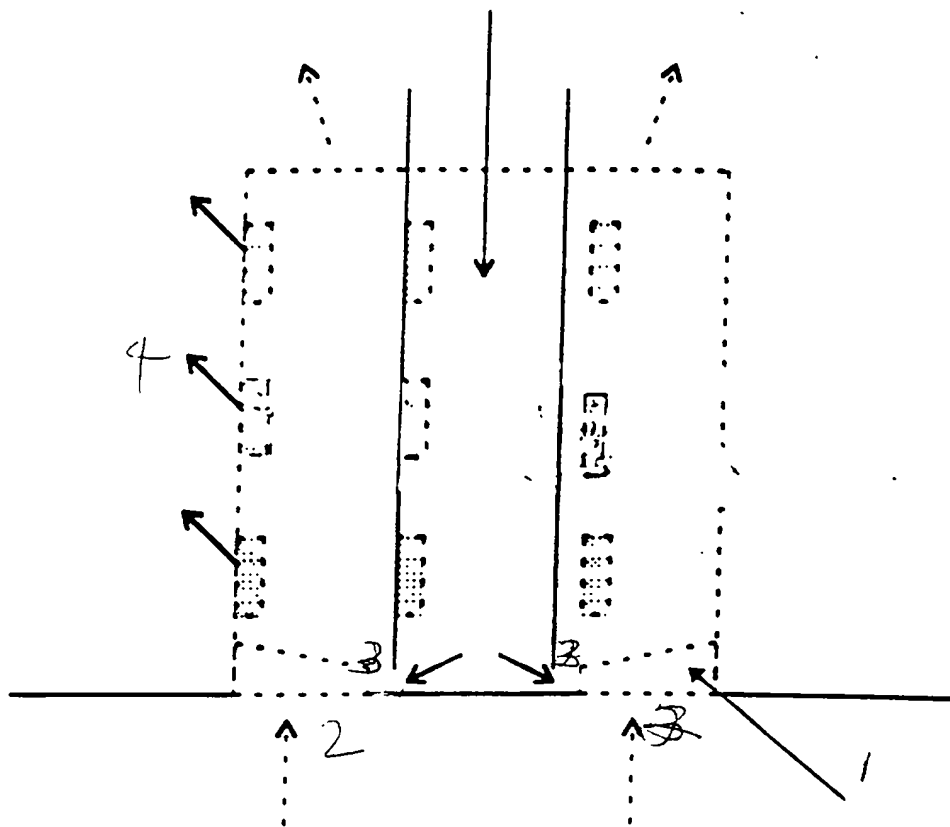

051077 063098
050130 2020150

Figure 2. =



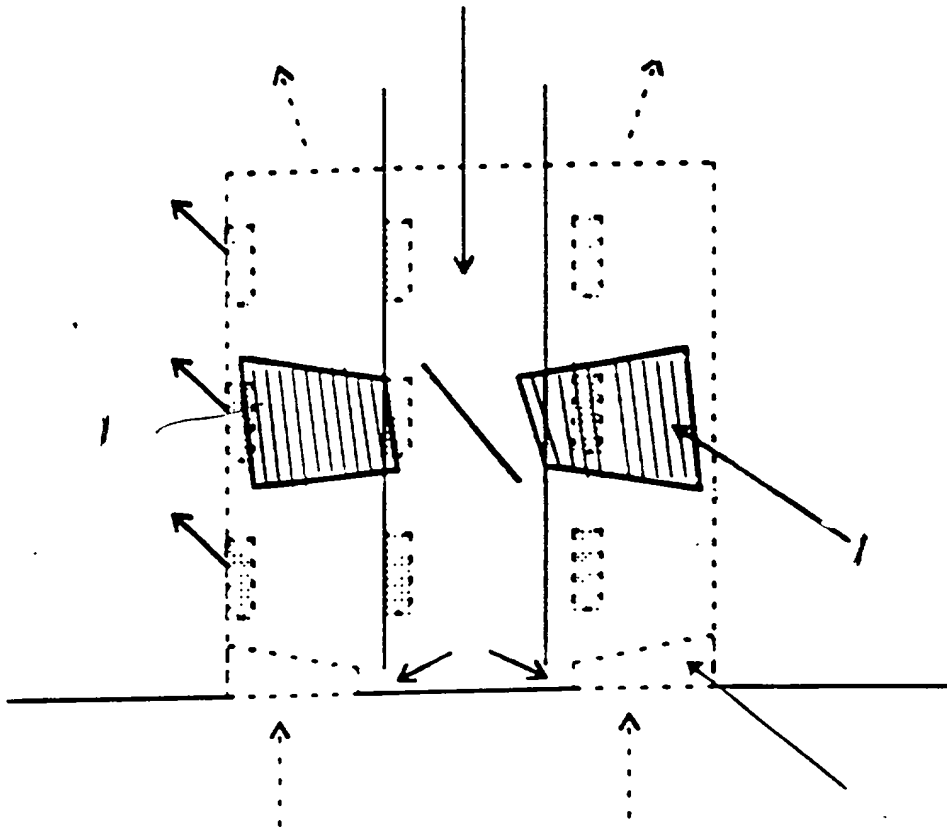


Figure 3

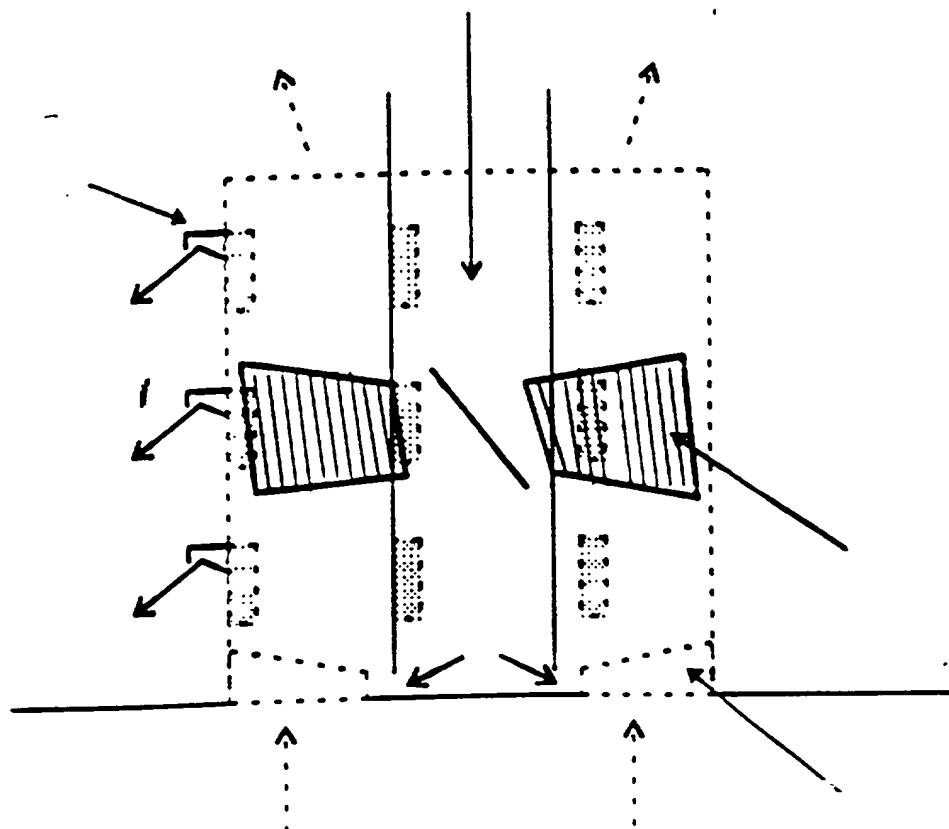


09407787 063098

Figure



2.


Figure 5

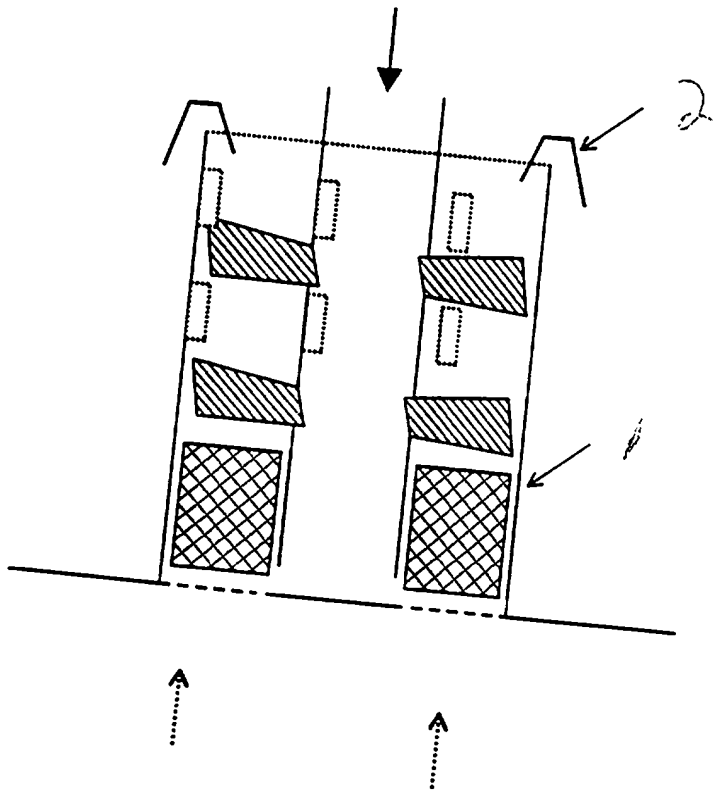[illegible]

under
est

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

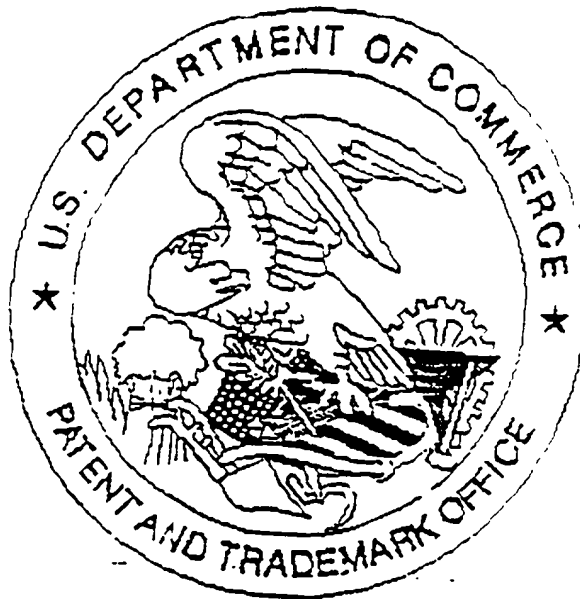

Application deficiencies found during scanning:

- 1 Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.51 because
 - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11" Pages _____ do not meet these requirements
 - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
 - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
 - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
 - ☐ Papers contain hand lettering.
- 2 Drawings are not in compliance and were not scanned because:
 - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
 - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11"
 - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
- 3 Page(s) _____ are not of sufficient clarity, contrast and quality for electronic reproduction
- 4 Page(s) _____ are missing.
- 5 OTHER No Declaration Enclosed

0630307101090509